



ISO9001

ISO14001



JTSCC

刮壁双向搅拌锅

Scraper cooker cooler

ZHEJIANG JHENTEN MACHINERY CO., LTD

浙江镇田机械有限公司

JHEN



TEN

刮壁双向搅拌锅

Scraper cooker cooler

产品介绍

我们的刮壁双向搅拌锅具有快速加热，保温，冷却，混合等功能。它由圆柱形体，锥形底及4个支脚组成。在它的侧壁和底部封头设计有夹套，加上使用了全刮面和双运动反向旋转搅拌，产品可以极快地加热和冷却。

应用

用于各种食品的加工，特别适用于大型饭店或食堂熬汤、煮饭、炖菜、熬粥等。用于制药、食品、化工、轻工等行业的液体配置、汤料和浓缩。

特点

- ◆ 夹层锅受热面积大，热效率高，加热均匀，沸腾时间短，加热温度容易控制。是食品加工提高质量、缩短时间、改善劳动条件的好设备。
- ◆ 容积：从25gal到800gal多种规格，也可按客户要求设计制造。
- ◆ 连接采用卡箍，内胆采用不锈钢304或不锈钢316L。内表面镜面抛光 $Ra \leq 0.28 \mu m$ 。外表面可根据客户要求要求进行抛光、喷砂、缎光处理。



Introduce


Our double scraper cooker has the functions of fast heating, keeping warm, cooling, mixing and so on. It consists of a cylindrical body, cone-shaped bottom and 4 supporting legs. Designed with a jacket on its sidewalls and bottom, coupled with the use of full-scraped surface and dual-motion counter-rotating agitator, assures the products can be heated and cooled extremely fast.

Application

Used for the processing of various kinds of food, specially used in large restaurant or dining room to boil soup, cook, stew, boil congee, etc. Used in liquid configuration, soup and concentration in pharmaceutical, food, chemical industry and light industry.

Features

- ◆ Jacketed kettle have large heating area, high thermal efficiency, even heating advantage, short boiling time and easy control of heating temperature. It is a good equipment to improve quality, shorten time and improve working conditions on food processing.
- ◆ Volume: from 25gal to 800gal and multiple specification, we can design and manufacture according to customer's requirement as well.
- ◆ The connection adopts Tri-clamp, the tanks inner use ss304 or ss316L. The inner surface mirror polishing $Ra \leq 0.28 \mu m$. Outer surface can be polished, sandblasted, satin as customer's requirement.

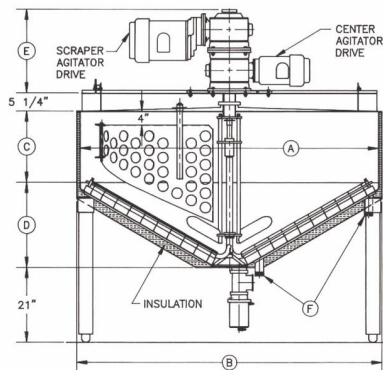



ISO9001

ISO14001



刮壁搅拌参数 Date Specifications of Scraper Agitator Drive

Model JTSCC-25	$\frac{1}{2}$ HP	30 RPM
Model JTSCC-50	1 HP	30 RPM
Model JTSCC-100	$1 \frac{1}{2}$ HP	20 RPM
Model JTSCC-200	2 HP	20 RPM
Model JTSCC-400	3 HP	20 RPM
Model JTSCC-800	5 HP	20 RPM

中心搅拌参数 Date Specifications of Center Agitator Drive

Model JTSCC-25	$\frac{3}{4}$ HP	90 RPM
Model JTSCC-50	1 HP	90 RPM
Model JTSCC-100	$1 \frac{1}{2}$ HP	90 RPM
Model JTSCC-200	$1 \frac{1}{2}$ HP	90 RPM
Model JTSCC-400	$1 \frac{1}{2}$ HP	90 RPM
Model JTSCC-800	3 HP	90 RPM

常规设计参数 Design Parameter

设计压力 Design pressure	按客户要求(ATM~1.0Mpa)
设计温度 Design temperature	罐体、夹套按客户要求(0℃~250℃)

材料 Material

钢体内胆 kettle liner	304、316L
钢体外层 kettle outlet layer	304
支腿等 Legs	304

连接 Connection

进出口 In-outlet	快装卡接、法兰、Tri-clamp, Flange
---------------	---------------------------

表面处理 Surface Finish

处理类型 Finish type	机械抛光、电解抛光、喷砂、酸洗 Mechanical/electrolytic polishing, sand blasting, pickling
抛光精度 Polishing precision	内壁 $0.4 \mu\text{m}$ 、外壁 $0.6 \mu\text{m}$ Inner surface $Ra \leq 0.4 \mu\text{m}$, Outside surface $Ra \leq 0.6 \mu\text{m}$

技术参数 Date Specifications

型号 Model	JTSCC-25	JTSCC-50	JTSCC-100	JTSCC-200	JTSCC-400	JTSCC-800
工作体积 Working Capacity Gal.	25	50	100	200	400	800
总体积 Full Capacity Gal.	76	116	206	367	642	1025
A – inches (I.D.)	36	48	60	72	84	84
B – inches (O.D.)	38	50	62	74	86	86
C – inches	14	11	12	15	20	35
D – inches	$9 \frac{1}{4}$	$12 \frac{3}{8}$	$15 \frac{3}{8}$	$19 \frac{1}{8}$	$23 \frac{1}{8}$	$23 \frac{1}{8}$
E – inches	$15 \frac{1}{8}$	$20 \frac{1}{8}$	$20 \frac{1}{8}$	$20 \frac{1}{8}$	$23 \frac{1}{8}$	31
F – MTP Size	1 1/2	1 1/2	2	2	2	2
重量 Weight – Pounds	850	1760	2150	2450	3560	4300
L.B./H.R. Steam (Nominal)	200	337	610	1080	2000	2000
满载电流(安培) Full Load Amps						
230V	5.6	8	11	13	16	23.4
460V	2.6	4	5.5	6.5	8	11.7



官网二维码



公众号二维码

浙江镇田机械有限公司 ZHEJIANG JHENTEN MACHINERY CO., LTD

地址: 浙江省温州市经济技术开发区滨海园区海桐路808号

Add: No.808 Haitong Road, Binhai Development Zone, Wenzhou Economic and Technological Development Zone, Zhejiang, China

Tel: +86-577-86867777

Service: +86-577-86825195

Fax: +86-577-86810195

E-mail: info@jhenten.com

Website: www.jhenten.com

Quality create future

品质依生 品致未来

声明: 本资料所有产品外观图片、颜色、参数仅供参考, 浙江镇田机械有限公司保留随时修改并不预先告知的权利。

Statement: All products appearance picture, color, parameters in the data for reference only. Zhejiang Jhenten Machinery Co., Ltd. reserves the right to change at any time without advance inform